



SMALL, BUT POWERFUL...



WeatherTRAK® ETPro²x

The new ET Pro² X Series Controllers feature a small mechanical size, yet are proven to be your most powerful water management and conservation tool.

New ET Pro² X Series One-Way and Two-Way Controllers offer all the power of the ET Pro² Series, but in a **small mechanical footprint limited to 30 stations**. Now you can save time, water and more money!

Ideal for: HOAs, small retail malls, fast-food restaurants, small business parks, and retro-fits to replace competitive small-sized controllers.

Incorporates the exclusive **WeatherTRAK ET Everywhere™** daily weather services as well as the patented “**Scheduling Engine™**” to take the guesswork out of how often and how much water to apply.

Internet-accessibility feature lets you monitor remotely. Upgrade from one-way to two-way with a simple two-way module kit.

Recognized by IA's SWAT protocol testing with **100% test scores for efficiency and run-off reduction potential**.

ET Pro²X Features

- Dedicated master valve which can be designated as normally open or closed.
- Dedicated pump start – uses a station output.
- 4 programs, 2 start times per program and up to 20 cycles per program.
- Compatible with RainMaster and TRC hand-held remotes when pigtails are wired into terminal blocks.
- Upgradable to Central Internet Management with a 2-way GPRS wireless modem.
- Automated cycle and soak.
- Automatic field wire fault protection and detection.
- Non-volatile memory.
- Heavy-duty surge protection.
- Station counts from 12-30 stations in 6 station increments.
- Now available with a small pedestal for new and retrofit applications.

Construction

- 16 gauge powder-coated, cold-rolled steel enclosure with key lock entry.
- UL approved weather-resistant enclosure.
- Easily removable outer door for improved access to field wiring and for installation.
- Key-hole mounting makes it easy to install.
- One-way paging option or two-way GPRS communication with access to WeatherTRAK's web-based Central Internet Control – even as a single controller.
- Large transformer allows for simultaneous operation of up to four programs.
- Flow sensing capability as a standard option – compatible with *Data Industrial™* IR-220 Series Flow Sensors.

Weights and Measures

Dimensions: 12" W x 16" H x 5-3/4" D. Weight 21 lbs.

Electrical Specifications

Input Power:
120 VAC +/- 10%, (60 Hz) or 220 VAC +/- 10%, (60 Hz)
0.50 Amps per station output (24 VAC)
Station Output Power: 24 VAC (60 Hz)
0.50 Amps per station output (24 VAC) per station max
0.50 Amps per station output (24 VAC) master valve/pump
3.0 Amps (80 VA) total load
UL Listed

Warranty 5-Years

HYDROPOINT DATA SYSTEMS, providers of WeatherTRAK® and ET Everywhere™, WWW.HYDROPOINT.COM.

Pedestal (Item 312PED)

Your ET Pro² X series controller can be ordered with a pedestal as one assembly or an accessory.



Benefits

- Small footprint makes it easy to replace an existing controller on a concrete pad.
- Mounting template and J-bolts are included for new construction and embedding into new concrete pad.
- Large internal cavity for excess field wires or GFI outlet with an on/off switch.
- Reinforced corners make it strong, but lightweight.

Construction

- 18 gauge powder-coated, cold-rolled steel enclosure.
- Four J-bolts and mounting template for new construction.
- Key lock entry.
- Internal mounting studs for vertically mounted terminal blocks. *(These are optional and are not WT accessories)*

Installation Details

Specifications and CAD installation details are available or log onto www.hydropoint.com


Weights and Measures

Dimensions: 11-1/4" W x 28" H x 4-1/8" D.

Weight 20 lbs.

Warranty 3-years

ET Pro² X Specifying Information

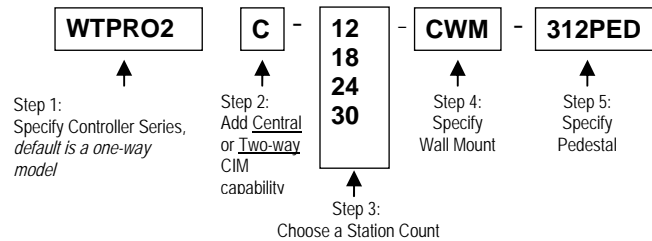

For example: A two-way, 18 station wall mount model would be specified as: **WTPRO2XC-18-CWM**

For example: A two-way, 18 station wall mount model with pedestal model would be specified as: **WTPRO2XC-18-CWM-312PED**

Pedestal Installation Detail

