



2011

 **WeatherTRAK**[®]

Product Catalog

 **HydroPoint**[®] data systems, inc.
The proven leader in Smart Water Management SM

Effective Date: April 1, 2011

Introduction

Our Mission Statement

The Planet's Future

Our mission statement:

The planet's future depends on water.

Our business is Smart Water Management.

Our mission is helping our customers save water, energy and money while protecting the planet's future.

The Proven Leader

HydroPoint Data Systems, Inc. presents Smart Water Management solutions proven to reduce water footprint while they deliver value and efficiencies faster than any other clean technology.

The Trusted Product

HydroPoint's smart irrigation controllers reliably eliminate overwatering, taking the guesswork out of how much or how often to apply water to landscapes.

HydroPoint's *WeatherTRAK* solutions calculate customized irrigation schedules based on programmable site-specific parameters such as soil type, slope angle, sprinkler head model and plant variety. Schedules are automatically adjusted based on microclimate weather data, accurate to a 1 square kilometer resolution, which is transmitted daily to each controller via wireless *WeatherTRAK ET Everywhere* service.

WeatherTRAK Central Internet Management (CIM) delivers cost-effective web-based management of one or more *WeatherTRAK ET Pro²* Central controllers from an easy-to-use web page. Measure, monitor, manage and report on water use in real-time with dynamic, remote adjustments for enhanced operational efficiencies across multiple sites.

WeatherTRAK solutions deliver field-tested hardware, precise *Scheduling Engine* and versatile commercial or residential applications that empower our customers to avoid the true costs of overwatering – property destruction, run-off and liabilities – to maximize sustainable savings and optimal plant health.

Table of Contents

- Introduction** 1
 - Our Promise to You 2
 - *WeatherTRAK*® Product Family Overview 3
 - How to Specify *WeatherTRAK* Controllers 4

- WeatherTRAK ET Everywhere*™** 5
 - Overview
 - *WeatherTRAK ET Everywhere*® Subscription Pricing

- Commercial Controllers** 6
 - *WeatherTRAK ET Pro² Smart Water Manager*™
 - Wall Mount and Small Pedestal Models. 7
 - Central Communication
 - Basic Communication
 - *WeatherTRAK ET Pro² Smart Water Manager*
 - Large Stainless Steel Pedestal Models. 8
 - Central Communication
 - Basic Communication
 - *WeatherTRAK ET Pro² Smart Water Manager*
 - Pre-assembled Chassis Models. 9
 - Central Communication
 - Basic Communication

- Residential Controllers** 10
 - *WeatherTRAK ET plus*® Series – Indoor and Outdoor Models .11
 - Basic Communication Only

- Accessories** 12
 - Rain Sensors 13
 - Communication Accessories 14
 - Master Valves and Flow Sensors 16

Our Promise to You

WeatherTRAK Product Series Warranty

HydroPoint Data Systems Inc. warrants to the purchaser of its *WeatherTRAK* products, when shipped in its original carton that they will be free from defects in materials and workmanship for the time period set forth below. During the warranty period, HydroPoint Data Systems, Inc. will, at its option, either repair the defect or replace the defective product or part thereof at no charge to the purchaser for parts during the warranty period.

- The *ET plus* Series has a three (3) year warranty from date of purchase
- The *ET Pro²* series Basic & Central (one-way and two-way models) have a five (5) year warranty from date of purchase.
- Peripherals, accessories, modems and other ancillary items purchased from HydroPoint Data Systems, Inc. will carry their manufacturer's standard warranty.

This warranty does not apply to any product which has been damaged, defaced, subjected to misuse, abnormal service or handling (including shipping damage), or which has been altered in design or construction.

The warranty described above is in addition to whatever implied warranty may be granted to purchaser by law. (All implied warranties, including the warranty of merchantability and fit for use, are limited to the period(s) from date of purchase set forth above).

Neither sales personnel of the seller nor any other person is authorized to make any warranties other than those described above, or to extend the duration of any warranties beyond the time period described herein.

The warranty described above shall be the sole and exclusive warranty granted by HydroPoint Data Systems, Inc. and shall be the sole and exclusive remedy available to the purchaser.

Correction of defects, in the manner and period of time described herein, shall constitute complete fulfillment of all liabilities and responsibilities of HydroPoint Data Systems, Inc. to the purchaser with respect to the product, and shall constitute full satisfaction of all claims, whether based on contract, negligence, strictly liability or otherwise.

In no event shall HydroPoint Data Systems, Inc., be liable or in any way responsible, for any damages or defects in the product which were caused by repairs or attempted repairs performed by anyone other than HydroPoint Data Systems, Inc.

Nor shall HydroPoint Data Systems, Inc., be liable or in any way responsible for any incidental or consequential economic or property damage. Some states do not allow the exclusion of incidental or consequential damages, so the above exclusion may not apply to you.

This warranty does not apply to improper installation or grounding, acts of God, such as lightning strikes and/or electrical line power surges, floods, earthquakes, hurricanes, tornados, vandalism, vermin such as slugs, ants, rodents etc., or improper electrical connections.

Warranty Service Procedures

In order to enforce the rights under this limited warranty, the purchaser must notify HydroPoint Data Systems, Inc., of a warranty claim by contacting (800) 362-8774. At that time, the purchaser will be asked to provide dated proof of original purchase. Acceptable forms of this shall be a photo copy or scanned image of the dated original invoice faxed or emailed to HydroPoint Data Systems, Inc. The purchaser will also need to provide a full description of the type of problem occurring, a contact name, address and telephone number and/or email. Purchaser may also be asked to return the defective product at their own expense.

Product Overview

Product Family Table of Key Features

WEATHERTRAK ET PRO² SMART WATER MANAGER SERIES:

- Small Wall Mount Enclosure/Pedestal
- Large Stainless Steel Pedestals
- Chassis Models

Commercial Series

Hardware Features

• Modular Station Counts	12-48 (Specified in 6-Station Increments)
• Diagnostic LEDs	Yes
• Wall Mount and Pedestal Enclosures	Yes
• Chassis versions	Yes
• Enclosure Finishes	Powder-Coated Steel Stainless Steel
• Flow Sensor Compatibility	Yes, Data Industrial & Creative Sensor Technology
• Handheld Remote Compatibility	Yes, TRC/Rainmaster
• Individual Master Valve and Pump Start	Yes
• Warranty	5 Years

Communication Features

• Basic and Central Communication	Yes, w/ upgrade from Basic
-----------------------------------	----------------------------

Programming Features

• WeatherTRAK Scheduling Engine	Yes
• WeatherTRAK ET Everywhere™ Subscription Service	Yes w/ multi-year offerings
• Number of Programs / Start Times	4 Programs, 2 Start Times with up to 20 Cycle/Soaks
• Central Internet Management	Yes
• Remote Alert Notification	Yes, via email and/or text message

ET plus SERIES

Residential Series

Hardware Features

• Station Counts	6, 9, 12, 18 & 24
• Diagnostic LEDs	No
• Wall Mount	Yes
• Enclosure Finishes	High-Impact Plastic
• Combined Master Valve / Pump Start	Yes
• Warranty	3 Years

Communication Features

• Basic Communication (only)	Yes
------------------------------	-----

Programming Features

• WeatherTRAK Proven Scheduling Engine	Yes
• WeatherTRAK ET Everywhere Subscription Service	Yes
• Number of Programs / Start Times	2 Programs, 2 Start Times with up to 20 Cycle/Soaks
• Alert Notification	Yes

How do I choose the right controller for my job?



Is the controller for **Commercial** or **Residential** use?

Commercial

Residential

See *WeatherTRAK ET Pro² Smart Water Manager*, page 10

See *WeatherTRAK ET plus*, page 6

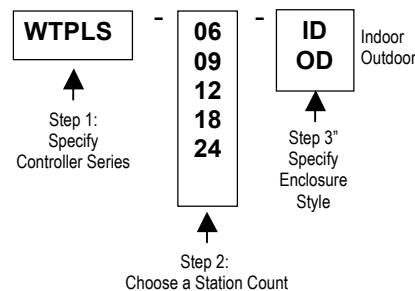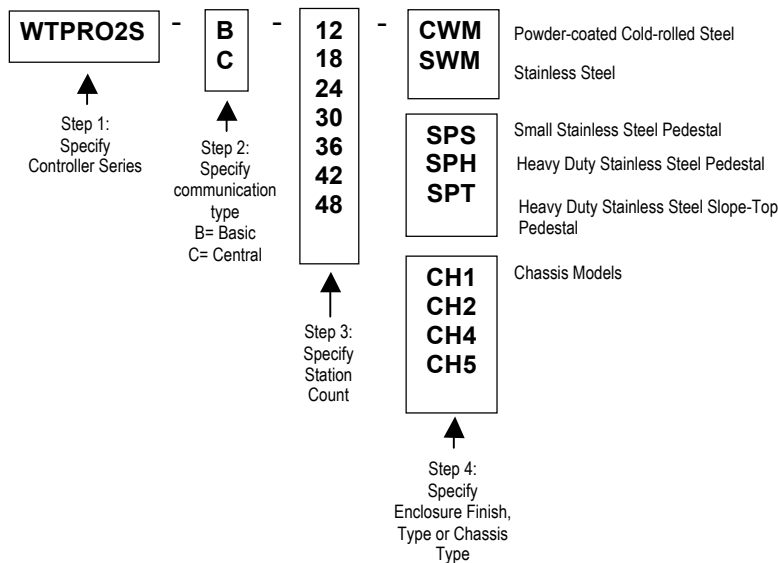

For example: A one-way, 9-station, indoor model with a 6-foot long power cord would be specified as: WTPLS-09-ID

For example: A one-way, 18 station, stainless steel wall mount model would be specified as: WTPRO2S-B-18-SWM

For example: A two-way, 18 station powder-coated cold-rolled steel wall mount model with a pedestal would be specified as: WTPRO2SC-18-CWM With a CPED

WeatherTRAK ET Everywhere Service

WeatherTRAK ET Everywhere™ Ensures Accurate Weather Updates

Proven, maintenance-free service ensures accurate weather updates, delivering daily, local weather-based ET updates via a wireless communication network to automatically adjust irrigation in accordance with changing weather. Data is collected from 45,000+ government-regulated weather stations across North America, run through our proprietary software to calculate ET down to 1 square kilometer accuracy, then sent to your *WeatherTRAK* controller.

WeatherTRAK Scheduling Engine Automates Accurate Irrigation

The *WeatherTRAK* Scheduling Engine software automates scientifically based irrigation schedules using landscape-specific parameters, such as plant, soil, slope and sprinkler type to quickly establish accurate irrigation schedules that match the optimum water needs for each zone of your landscape. Gain control over water windows, water days and manual water with *WeatherTRAK* controllers.

HydroPoint Customer Service Provides Customized Expertise

The HydroPoint Professional Services team provides comprehensive technical and customer support from our trained English and Spanish speaking horticulture and irrigation experts. HydroPoint Customer Service is a key component of *WeatherTRAK* weather-based irrigation management because satisfied customers are our first priority.

Help is just a phone call or mouse-click away.

ET EVERYWHERE™: COMMERCIAL SERVICE

Central Communication (Two-way) – ET Pro² Series

Model #

WeatherTRAK ET Pro² Series Controllers

1-Year 12-48 station controllers	CIM-PRO2C-1248-1Y
3-Years 12-48 station controllers	CIM-PRO2C-1248-3Y
5-Years 12-48 station controllers	CIM-PRO2C-1248-5Y

Basic Communication (One-way) – ET Pro² Series

WeatherTRAK ET Pro² Series Controllers

1-Year 12-48 station controllers	ETE-PRO2-1248-1Y
3-Years 12-48 station controllers (5% discount)	ETE-PRO2-1248-3Y
5-Years 12-48 station controllers (10% discount)	ETE-PRO2-1248-5Y

ET EVERYWHERE™: RESIDENTIAL SERVICE

Basic Communication (One-way) – ET plus Series

WeatherTRAK ET plus Series 6, 9, & 12 Station Controllers

1-Year, 6, 9 & 12 station controllers	ETE-912-1Y
2-Years, 6, 9 & 12 station controllers	ETE-912-2Y
3-Years, 6, 9 & 12 station controllers (5% discount)	ETE-912-3Y
5-Years, 6, 9 & 12 station controllers (10% discount)	ETE-912-5Y

WeatherTRAK ET plus Series 18 & 24 Station Controllers

1-Year, 18 & 24 station controllers	ETE-1824-1Y
2-Years, 18 & 24 station controllers	ETE-1824-2Y
3-Years, 18 & 24 station controllers (5% discount)	ETE-1824-3Y
5-Years, 18 & 24 station controllers (10% discount)	ETE-1824-5Y

ET EVERYWHERE™ SERVICE

COMMERCIAL CONTROLLERS:
WALL MOUNT & SMALL PEDIESTAL

COMMERCIAL CONTROLLERS:
LARGE STEEL PEDIESTAL

COMMERCIAL CONTROLLERS:
PRE-ASSEMBLED CHASSIS

RESIDENTIAL CONTROLLERS

ACCESSORIES

Commercial Controllers



WeatherTRAK ET Pro² Smart Water Manager

COMMERCIAL CONTROLLERS: Wall-Mount and Small Pedestal Series

The WeatherTRAK ET Pro² Smart Water Manager series features ease of installation and ease of use for high-end residential, light commercial, institutional and heavy commercial applications.

This new hardware platform offers large internal cavity to house excess field wires, terminal blocks in a small mechanical footprint. Designed to withstand outdoor elements, the *Smart Water Manager* offers maximum programming capabilities and user inputs, creating the greatest value with the shortest rate of return on your water conserving efforts.

Basic communication (one-way paging) or Central communication (two way) GPRS with access to *WeatherTRAK Central Internet Management* - even as a single controller.

Key Features

- Central or Basic communication options
- Station modularity offering 12, 18, 24, 30, 36, 42 & 48 station range
- 4 programs, 2 start times per program
- Automated cycle and soak
- 3 station modes:
 - Automated by WeatherTRAK
 - User w/ ET
 - User No ET
- Non-volatile memory
- 18-gauge powder-coated steel or stainless steel wall mount enclosures
- Optional pedestals for either finish
- Dedicated flow, rain and handheld remote ports
- Individual master valve and pump start
- 5-year warranty

ET EVERYWHERE™ SERVICE





COMMERCIAL CONTROLLERS:
WALL MOUNT & SMALL PEDIESTAL

COMMERCIAL CONTROLLERS:
LARGE STEEL PEDIESTAL

COMMERCIAL CONTROLLERS:
PRE-ASSEMBLED CHASSIS

RESIDENTIAL CONTROLLERS

ACCESSORIES




Finish / Enclosure Type	Station Count	Communication	
		TWO-WAY (Central) <i>Model #</i>	ONE-WAY (Basic) <i>Model #</i>
WALL MOUNT: Cold Rolled Steel 18-gauge, powder-coated, cold-rolled steel, wall mount enclosure w/ key-lock entry. 21 lbs. 12" w x 17" h x 5.75" d 	12-station	WTPRO2S-C-12-CWM	WTPRO2S-B-12-CWM
	18-station	WTPRO2S-C-18-CWM	WTPRO2S-B-18-CWM
	24-station	WTPRO2S-C-24-CWM	WTPRO2S-B-24-CWM
	30-station	WTPRO2S-C-30-CWM	WTPRO2S-B-30-CWM
	36-station	WTPRO2S-C-36-CWM	WTPRO2S-B-36-CWM
	42-station	WTPRO2S-C-42-CWM	WTPRO2S-B-42-CWM
	48-station	WTPRO2S-C-48-CWM	WTPRO2S-B-48-CWM
Sub-assembly for Pedestal Conversion: 16-gauge, powder-coated, cold-rolled steel pedestal enclosure w/ key-lock entry. 21 lbs. 11.25" w x 28" h x 4.25" d 	All models	WTPRO2S-CPED (same model # and price for both communication options)	
WALL MOUNT: Stainless Steel 18-gauge, stainless steel, wall mount enclosure w/ key-lock entry. 21 lbs. 12" w x 17" h x 5.75" d 	12-station	WTPRO2S-C-12-SWM	WTPRO2S-B-12-SWM
	18-station	WTPRO2S-C-18-SWM	WTPRO2S-B-18-SWM
	24-station	WTPRO2S-C-24-SWM	WTPRO2S-B-24-SWM
	30-station	WTPRO2S-C-30-SWM	WTPRO2S-B-30-SWM
	36-station	WTPRO2S-C-36-SWM	WTPRO2S-B-36-SWM
	42-station	WTPRO2S-C-42-SWM	WTPRO2S-B-42-SWM
	48-station	WTPRO2S-C-48-SWM	WTPRO2S-B-48-SWM
Sub-assembly for Pedestal Conversion: 16-gauge, stainless steel, pedestal enclosure w/ key-lock entry. 21 lbs. 11.25" w x 28" h x 4.25" d 	All models	WTPRO2S-SPED (same model # and price for both communication options)	

WeatherTRAK ET Pro² Smart Water Manager

COMMERCIAL CONTROLLERS: Large Stainless Steel Pedestal Series

The WeatherTRAK ET Pro² Smart Water Manager series features ease of installation and ease of use for high-end residential, light commercial, institutional and heavy commercial applications.

The following series is offered in VIT Strongbox enclosures as pre-built assemblies for institutional and other commercial applications where potential for vandalism is high.

Finish / Enclosure Type	Station Count	Communication	
		TWO-WAY (Central) Model #	ONE-WAY (Basic) Model #
Heavy-Duty, Front Entry Stainless Steel Pedestal 14-gauge stainless steel, NEMA 3R rated front entry enclosure w/ key lock entry. VIT Strongbox Enclosure model no. SB-18SS.  45 lbs. 18" w x 36" h x 12" d	12-station	WTPRO2S-C-12-SPH	WTPRO2S-B-12-SPH
	18-station	WTPRO2S-C-18-SPH	WTPRO2S-B-18-SPH
	24-station	WTPRO2S-C-24-SPH	WTPRO2S-B-24-SPH
	30-station	WTPRO2S-C-30-SPH	WTPRO2S-B-30-SPH
	36-station	WTPRO2S-C-36-SPH	WTPRO2S-B-36-SPH
	42-station	WTPRO2S-C-42-SPH	WTPRO2S-B-42-SPH
	48-station	WTPRO2S-C-48-SPH	WTPRO2S-B-48-SPH
Heavy-Duty, Slope, Top-Entry Stainless Steel Pedestal 14-gauge stainless steel, NEMA 3R rated slope, top-entry enclosure w/ key lock entry to upper and lower compartments. VIT Strongbox Enclosure model no. SB-16SS.  70 lbs. 16 w x 38" h x 15.5" d	12-station	WTPRO2S-C-12-SPT	WTPRO2S-B-12-SPT
	18-station	WTPRO2S-C-18-SPT	WTPRO2S-B-18-SPT
	24-station	WTPRO2S-C-24-SPT	WTPRO2S-B-24-SPT
	30-station	WTPRO2S-C-30-SPT	WTPRO2S-B-30-SPT
	36-station	WTPRO2S-C-36-SPT	WTPRO2S-B-36-SPT
	42-station	WTPRO2S-C-42-SPT	WTPRO2S-B-42-SPT
	48-station	WTPRO2S-C-48-SPT	WTPRO2S-B-48-SPT
Light-Duty, Front Entry Stainless Steel Pedestal 16-gauge stainless steel, NEMA 3R rated front entry enclosure w/ key lock entry. VIT Strongbox Enclosure model no. LD-16S.  21 lbs. 16.75 w x 30" h x 8.25" d	12-station	WTPRO2S-C-12-SPS	WTPRO2S-B-12-SPS
	18-station	WTPRO2S-C-18-SPS	WTPRO2S-B-18-SPS
	24-station	WTPRO2S-C-24-SPS	WTPRO2S-B-24-SPS
	30-station	WTPRO2S-C-30-SPS	WTPRO2S-B-30-SPS
	36-station	WTPRO2S-C-36-SPS	WTPRO2S-B-36-SPS
	42-station	WTPRO2S-C-42-SPS	WTPRO2S-B-42-SPS
	48-station	WTPRO2S-C-48-SPS	WTPRO2S-B-48-SPS

ET EVERYWHERE™ SERVICE

COMMERCIAL CONTROLLERS:
WALL MOUNT & SMALL PEDIestal

COMMERCIAL CONTROLLERS:
LARGE STEEL PEDIestal

COMMERCIAL CONTROLLERS:
PRE-ASSEMBLED CHASSIS

RESIDENTIAL CONTROLLERS





ACCESSORIES

WeatherTRAK ET Pro² Smart Water Manager

COMMERCIAL CONTROLLERS: Pre-assembled Chassis Only Series

The WeatherTRAK ET Pro² Smart Water Manager series features ease of installation and ease of use for high-end residential, light commercial, institutional and heavy commercial applications.

The ET Pro² Smart Water Manager platform is also offered in pre-assembled, aluminum back panel models for retrofit applications into a wide variety of either cold-rolled steel or stainless steel enclosures. These models have all of the same features and benefits as the wall mount or pedestal enclosure models.

Finish / Enclosure Type	Station Count	Communication		
		TWO-WAY (Central) <i>Model #</i>	ONE-WAY (Basic) <i>Model #</i>	
Wall Mount Chassis 16.5" w x 16.5" h 18-gauge anodized, pre-assembled, aluminum back panel retrofits into any wall mount enclosure 18" w x 18" h x 10" d or larger. (e.g., VIT Strongbox Enclosure Pedestal LD-18SW series)		12-station	WTPRO2S-C-12-CH1	WTPRO2S-B-12-CH1
		18-station	WTPRO2S-C-18-CH1	WTPRO2S-B-18-CH1
		24-station	WTPRO2S-C-24-CH1	WTPRO2S-B-24-CH1
		30-station	WTPRO2S-C-30-CH1	WTPRO2S-B-30-CH1
		36-station	WTPRO2S-C-36-CH1	WTPRO2S-B-36-CH1
		42-station	WTPRO2S-C-42-CH1	WTPRO2S-B-42-CH1
		48-station	WTPRO2S-C-48-CH1	WTPRO2S-B-48-CH1
				17 lbs. 16.5" w x 16.5" h
Pedestal Chassis 16" w x 32" h 18-gauge anodized, pre-assembled, aluminum back panel retrofits into any front entry pedestal 18" w x 36" h x 12" d or larger. (e.g., VIT Strongbox Enclosure Pedestal SB-18SS series)		12-station	WTPRO2S-C-12-CH2	WTPRO2S-B-12-CH2
		18-station	WTPRO2S-C-18-CH2	WTPRO2S-B-18-CH2
		24-station	WTPRO2S-C-24-CH2	WTPRO2S-B-24-CH2
		30-station	WTPRO2S-C-30-CH2	WTPRO2S-B-30-CH2
		36-station	WTPRO2S-C-36-CH2	WTPRO2S-B-36-CH2
		42-station	WTPRO2S-C-42-CH2	WTPRO2S-B-42-CH2
		48-station	WTPRO2S-C-48-CH2	WTPRO2S-B-48-CH2
				20 lbs. 16.5" w x 32" h
Pedestal Chassis 14" w x 26" h 18-gauge anodized, pre-assembled, aluminum back panel retrofits into any slope, top-entry pedestal 16" x 38" h x 15.5" d or larger. (e.g., VIT Strongbox Enclosure Pedestal SB-16SS series)		12-station	WTPRO2S-C-12-CH4	WTPRO2S-B-12-CH4
		18-station	WTPRO2S-C-18-CH4	WTPRO2S-B-18-CH4
		24-station	WTPRO2S-C-24-CH4	WTPRO2S-B-24-CH4
		30-station	WTPRO2S-C-30-CH4	WTPRO2S-B-30-CH4
		36-station	WTPRO2S-C-36-CH4	WTPRO2S-B-36-CH4
		42-station	WTPRO2S-C-42-CH4	WTPRO2S-B-42-CH4
		48-station	WTPRO2S-C-48-CH4	WTPRO2S-B-48-CH4
				22 lbs. 14" w x 26" h
Pedestal Chassis 14.5" w x 27" h 18-gauge anodized, pre-assembled, aluminum back panel retrofits into any front entry pedestal 16.75" w x 30" h x 8.25" d or larger. (e.g., VIT Strongbox Enclosure Pedestal LD-16S series)		12-station	WTPRO2S-C-12-CH5	WTPRO2S-B-12-CH5
		18-station	WTPRO2S-C-18-CH5	WTPRO2S-B-18-CH5
		24-station	WTPRO2S-C-24-CH5	WTPRO2S-B-24-CH5
		30-station	WTPRO2S-C-30-CH5	WTPRO2S-B-30-CH5
		36-station	WTPRO2S-C-36-CH5	WTPRO2S-B-36-CH5
		42-station	WTPRO2S-C-42-CH5	WTPRO2S-B-42-CH5
		48-station	WTPRO2S-C-48-CH5	WTPRO2S-B-48-CH5
				22 lbs. 14.5" w x 27" h

ET EVERYWHERE™ SERVICE
 COMMERCIAL CONTROLLERS: WALL MOUNT & SMALL PEDestal
 COMMERCIAL CONTROLLERS: LARGE STEEL PEDestal
 COMMERCIAL CONTROLLERS: PRE-ASSEMBLED CHASSIS
 RESIDENTIAL CONTROLLERS
 ACCESSORIES

Residential Controllers



WeatherTRAK ET plus Series

RESIDENTIAL Models

Every WeatherTRAK ET plus series controller is powered by the industry's most reliable evapotranspiration-based (ET) data, proven to deliver savings by the California EPA, in 24 other independent studies and with IA SWAT™ results of 100% irrigation adequacy and 0% irrigation excess for perfect efficiency with zero overwatering. The Scheduling Engine automatically adjusts each day to your local weather patterns through the patented WeatherTRAK ET Everywhere service.

Key Features

- Basic Communication only – 900 MHz (flex) radio receives localized daily WeatherTRAK ET Everywhere updates
- 6, 8, 12, 18 & 24 station models
- 2 programs
- 2 start times per program with up to 20 Cycle/Soaks
- Automated cycle and soak
- 3 station modes:
 - Automated by WeatherTRAK
 - User w/ ET
 - User No ET
- Non-volatile memory
- High-impact plastic enclosure for indoor and outdoor applications w/ key-lock entry
- Comes standard w/ an externally mounted bow-tie antenna
- Indoor models come w/ pre-installed 3-prong power cord
- Automated field wire diagnostics
- Rain sensor input
- Combined master valve or pump start
- 3-year warranty

ET EVERYWHERE™ SERVICE

COMMERCIAL CONTROLLERS:
WALL MOUNT & SMALL PEDestal

COMMERCIAL CONTROLLERS:
LARGE STEEL PEDestal

COMMERCIAL CONTROLLERS:
PRE-ASSEMBLED CHASSIS

RESIDENTIAL CONTROLLERS

ACCESSORIES

Finish / Enclosure Type	Station Count	Enclosure Style	
		INDOOR <i>Model #</i>	OUTDOOR <i>Model #</i>
WALL MOUNT: High-Impact Plastic Indoor and Outdoor Enclosure 8 lbs. 10.25" w x 12.5" h x 4.75" d	6-station	WTPLS-06-ID	WTPLS-06-OD
	9-station	WTPLS-09-ID	WTPLS-09-OD
	12-station	WTPLS-12-ID	WTPLS-12-OD
	18-station	WTPLS-18-ID	WTPLS-18-OD
	24-station	WTPLS-24-ID	WTPLS-24-OD



Note: All ET plus series pricing includes 1 year of WeatherTRAK ET Everywhere subscription service

Accessories



WeatherTRAK Controller Series Accessories

ACCESSORIES


Easy-to-install expansion cards, accessories and antennas upgrade your current controller's reception, control compatibility and remote interface.

ACCESSORIES: RAIN SENSORS

Rain Sensor - Wired Model

Normally closed, wired rain sensor. 25' of cable and includes bracket adapter for conduit mounting. Adjustable shut-off settings from 1/8" to 3/4" and adjustable dry-out vent.

0.65 lbs.
4.25" w x 5.25" h x 1.75" d



Model #

WT-RS

Compatible with

ET Pro²
Basic

ET Pro²
Central


ET plus
Series



Rain Sensor - Wireless Model

Normally closed, wireless rain sensor. 300' line-of-sight range. Includes vertical wall / fence mounting bracket and bracket adapter for conduit mounting, 5-year battery life, adjustable shut-off settings from 1/8" to 3/4" and adjustable dry-out vent. Receiver module contains signal strength meter and battery life indicator.

0.60 lbs.
4" w x 4.5" h x 1.75" d




WT-WRS



Rain/Freeze Sensor - Wireless Model

Normally closed, wireless rain/ freeze sensor. 300' line-of-sight range. Includes vertical wall / fence mounting bracket and bracket adapter for conduit mounting, 5-year battery life, adjustable shut-off settings from 1/8" to 3/4", pre-set freeze shut-off and adjustable dry-out vent. Receiver module contains signal strength meter and battery life indicator.

0.65 lbs.
4" w x 4.5" h x 1.75" d



WT-WRSF



*** WARRANTY: Manufacturer's warranty for all Rain Sensors is 5 years from date of purchase.**

ET EVERYWHERE™ SERVICE

COMMERCIAL CONTROLLERS:
WALL MOUNT & SMALL PEDestal

COMMERCIAL CONTROLLERS:
LARGE STEEL PEDestal

COMMERCIAL CONTROLLERS:
PRE-ASSEMBLED CHASSIS

RESIDENTIAL CONTROLLERS

ACCESSORIES

ACCESSORIES

Easy-to-install expansion cards, accessories and antennas upgrade your current controller's reception, control compatibility and remote interface.

ACCESSORIES: COMMUNICATION (pg. 1 of 2)

6 ft. Long 120 volt Power Cord

3-prong, UL-listed power cord w/ strain relief. Included with all WeatherTRAK ET plus Indoor models.


0.5 lbs.
6' long



Basic Communication Bowtie Antenna

900 (Flex) MHz provides improved reception for ET plus series only. Comes w/ 6' long cable assembly and mounting hardware.

0.25 lbs.
.75" w x 4" h x .25" d



Basic Communication Pancake Antenna

900 (Flex) MHz provides improved reception for controllers mounted within enclosures. Boosts received signal when needed.


0.5 lbs.
4" w x 1.5" h x 4" d



Basic Communication Antenna Amplifier Kit

900 (Flex) MHz –amplifier assembly to boost signal strength when Phase Integrity is less than 30. For ET plus series only.


4 lbs.
3.25" w x 12.5" h x 4" d



AC Surge Protection Kit

120-Volt in-line surge protector for sites w/ dirty power or where additional protection is needed.

1 lb.
4" w x 4" h x 2" d



Central Monopole Antenna – GPRS

Vertically mounted, monopole antenna w/ cable assemblies for central communication application only.

5 lbs.
18" l x 1" dia.



Model #	Compatible with		
	ET Pro ² Basic	ET Pro ² Central	ET plus Series
WTPWR-06			■
ANT-FLEX-BT			■
ANT-FLEX-PC	■		■
ANT-AMP-Kit	■		■
WT-SPK	■	■	
ANT-FLEX-MP		■	

ET EVERYWHERE™ SERVICE
COMMERCIAL CONTROLLERS: WALL MOUNT & SMALL PEDestal
COMMERCIAL CONTROLLERS: LARGE STEEL PEDestal
COMMERCIAL CONTROLLERS: PRE-ASSEMBLED CHASSIS
RESIDENTIAL CONTROLLERS
ACCESSORIES

*** WARRANTY:** 3 year warranty from the date of purchase for all communication accessories.


ACCESSORIES: COMMUNICATION (pg. 2 of 2)

Easy-to-install expansion cards, accessories and antennas upgrade your current controller's reception, control compatibility and remote interface.

WeatherTRAK Central Internet Management Upgrade

Upgrades a Basic *ET Pro²* controller to Central with *WeatherTRAK* Central Internet Management capabilities. Upgrade includes expansion board and central pancake antenna provides access to www.weathertrak.net central web monitoring and management.

2 lbs.
4" w x 6" h x 1" d



Central Pancake Antenna –

821.1850 MHz pancake style antenna w/ 3' long antenna cable for two-way communication controllers only.


.5 lbs.
4" w x 1.5" h x 4" d



Central Antenna Amplifier Kit

Two-way antenna amplifier assembly with cable assemblies. Kit is housed within an 18-gauge, powder-coated, cold-rolled steel enclosure w/ key-lock entry.


17 lbs.
12" w x 17" h x 5-1/4" d



Central Antenna Amplifier Kit w/ Yagi Antenna

Two-way Antenna Amplifier assembly with cable assemblies. Kit is housed within an 18 gauge, powder-coated, cold-rolled steel enclosure w/ key lock entry. Also includes Yagi direction antenna w/ mounting brackets and 30' of custom coax cable.


22 lbs.
12" w x 17" h x 5-1/4" d

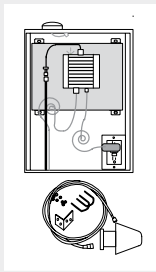

6-Station Key – *ET Pro²* Smart Water Manager Series

Station module to increase station count by 6 stations.


1/2 oz.
7/8" x 1-13/16"



24-Station Output Board – *ET Pro²* Smart Water Manager Series

24-station output board, to expand an *ET Pro²* SWM above 24 stations. Does not include station keys which are sold separately.

2 lbs.
5.25" w x 9.25" h



Model #	Compatible with		
	<i>ET Pro²</i> Basic	<i>ET Pro²</i> Central	<i>ET plus</i> Series
WTEXB-PRO2-CIM		■	
ANT-GPRS-PC		■	
ANT-AMP-C-Kit		■	
ANT-AMP-C-Yagi-Kit		■	
WTPRO2S-6STA-KEY	■	■	
WTPRO2S-STA-EXT-BRD	■	■	

ET EVERYWHERE™ SERVICE
COMMERCIAL CONTROLLERS:
 WALL MOUNT & SMALL PEDestal
COMMERCIAL CONTROLLERS:
 LARGE STEEL PEDestal
COMMERCIAL CONTROLLERS:
 PRE-ASSEMBLED CHASSIS
RESIDENTIAL CONTROLLERS

ACCESSORIES


*** WARRANTY:** 3-year warranty from the date of purchase for all communication accessories.

ACCESSORIES

ACCESSORIES: MASTER VALVES

Normally Open Brass Master Valves Series*

Superior, 3100 series, brass, normally open, globe and angle styles with electrically actuated solenoid master valve series. Weight and dimensions vary based on size.




	Model #	Compatible with	
		ET Pro ² Basic	ET Pro ² Central
3/4" Globe Style, Normally Open Master Valve	WT-MV-075G-SNO	■	■
1" Globe Style, Normally Open Master Valve	WT-MV-100G-SNO	■	■
1-1/4" Globe Style, Normally Open Master Valve	WT-MV-125G-SNO	■	■
1-1/2" Globe Style, Normally Open Master Valve	WT-MV-150G-SNO	■	■
2" Globe Style, Normally Open Master Valve	WT-MV-200G-SNO	■	■
2-1/2" Globe Style, Normally Open Master Valve	WT-MV-250G-SNO	■	■
3" Globe Style, Normally Open Master Valve	WT-MV-300G-SNO	■	■
1" Angle Style, Normally Open Master Valve	WT-MV-100A-SNO	■	■
1-1/2" Angle Style, Normally Open Master Valve	WT-MV-150A-SNO	■	■
2" Angle Style, Normally Open Master Valve	WT-MV-200A-SNO	■	■
2-1/2" Angle Style, Normally Open Master Valve	WT-MV-250A-SNO	■	■
3" Angle Style, Normally Open Master Valve	WT-MV-300A-SNO	■	■

For more technical information log onto www.superiorcontrolsco.com

ACCESSORIES: FLOW SENSORS

Creative Sensor Technology Flow Sensors*

Solvent weld, Sch 40, PVC tee, flow sensor series w/ removable HDPE impeller, Rated to working pressure of 240 PSI. Recommended for below grade installations. Maximum wire run 2000 feet. 48 inch single conductor lead.




1" PVC Tee Model	WT-FS-100-CST	■	■
1-1/2" PVC Tee Model	WT-FS-150-CST	■	■
2" PVC Tee Model	WT-FS-200-CST	■	■

For more technical information log onto www.creativesensortechnologies.com

Badger Meter (Data Industrial) Flow Sensors*

Solvent weld, Sch 80 PVC tee, flow sensor series with glass-filled nylon, removable impeller. Rated to working pressure of 100 PSI. Recommended for below grade installation. Maximum wire run 2000 feet. 48-inch single conductor lead.



1/2" PVC Tee Model	WT-FS-050-DI	■	■
3/4" PVC Tee Model	WT-FS-075-DI	■	■
1" PVC Tee Model	WT-FS-100-DI	■	■
1-1/2" PVC Tee Model	WT-FS-150-DI	■	■
2" PVC Tee Model	WT-FS-200-DI	■	■
3" PVC Tee Model	WT-FS-300-DI	■	■
4" PVC Tee Model	WT-FS-400 DI	■	■

For more technical information log onto www.badgermeter.com

*** WARRANTY: Manufacturer's warranty for Master Valves is 5-years from date of purchase. Manufacturer's warranty for Flow Sensors are 1-year from date of purchase.**

ET EVERYWHERE™ SERVICE

COMMERCIAL CONTROLLERS: WALL MOUNT & SMALL PEDestal

COMMERCIAL CONTROLLERS: LARGE STEEL PEDestal

COMMERCIAL CONTROLLERS: PRE-ASSEMBLED CHASSIS

RESIDENTIAL CONTROLLERS

ACCESSORIES



The proven leader in Smart Water ManagementSM

hydropoint.com

1720 Corporate Circle Petaluma, CA 94954

Toll-free Customer Service 800.362.8774

Fax 707.769.9695

Customer Service

Toll-free
800.362.8774
support@hydropoint.com

Train online

to be a

**WeatherTRAK
Smart Water Manager.**

Go to:

<https://hydropointtraining.webex.com>



Learn how
leading
companies
implement
WeatherTRAK

Smart Water Management solutions
to achieve their **financial and
environmental goals.**

<http://www.hydropoint.com/webcast>

